



COPY OF PAPERS
ORIGINALLY FILED

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

3628
0360
3628
#9 Paper
Priority
4/26/02

Applicant : Robert J. Macdonald
Serial No.: 09/995,899
Filed: November 28, 2001
Title: TEXTILE CONSTRUCTION
Docket No.: 34200

LETTER

RECEIVED

APR 03 2002

GF-UP 3600

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Enclosed is a certified copy of TEXTILE CONSTRUCTION Patent Application
No. 2,357,602; the priority of which has been claimed in the above-identified application.

Respectfully submitted,

PEARNE & GORDON LLP

John P. Murtaugh
John P. Murtaugh, Reg. No. 34226

526 Superior Avenue East
Suite 1200
Cleveland, Ohio 44114-1484
(216) 579-1700

Date: 1-8-02

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231 on the date indicated below.

John P. Murtaugh

Name of Attorney for Applicant(s)

January 8, 2002 John P. Murtaugh
Date Signature of Attorney



Offic d la propriété
intell ctuelle
du Canada

Canadian
Intell ctual Property
Office

Un organisme
d'Industri Canada

An Agency of
Industry Canada



*Bureau canadien
des brevets*
Certification

*Canadian Patent
Office*
Certification

La présente atteste que les documents
ci-joints, dont la liste figure ci-dessous,
sont des copies authentiques des docu-
ments déposés au Bureau des brevets.

This is to certify that the documents
attached hereto and identified below are
true copies of the documents on file in
the Patent Office.

Specification and Drawings, as originally filed, with Application for Patent Serial No:
2,357,602, on September 21, 2001, by ROBERT J. MACDONALD, for "Textile
Construction".

RECEIVED
APR 03 2002
GROUP

Agent certificateur/Certifying Officer

November 27, 2001

Date

Canada

(CIPO 68)
01-12-00

OPIC  CIPO

1/2

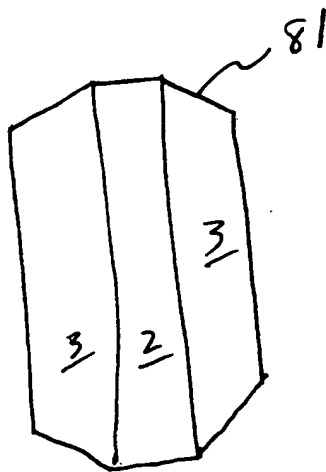
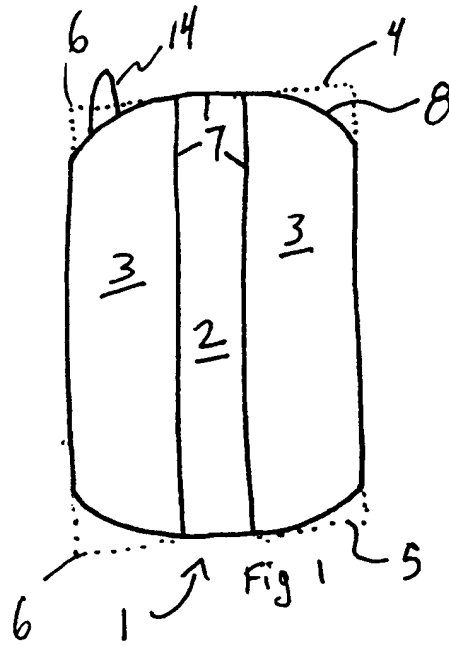


Fig 1 A

2/2

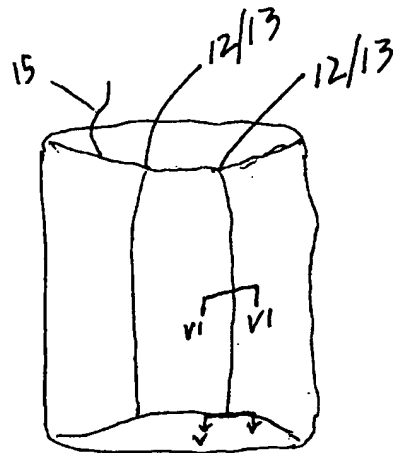
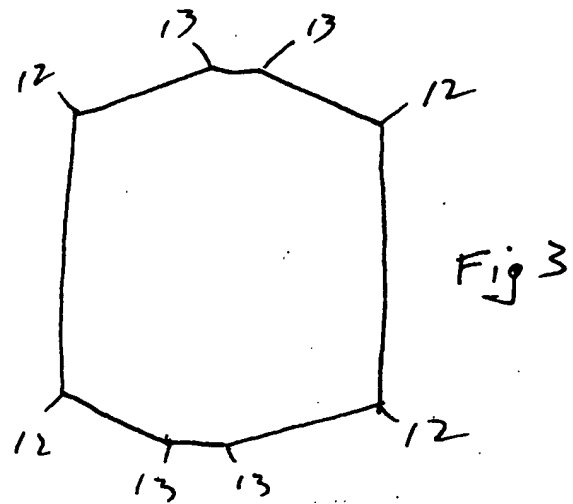
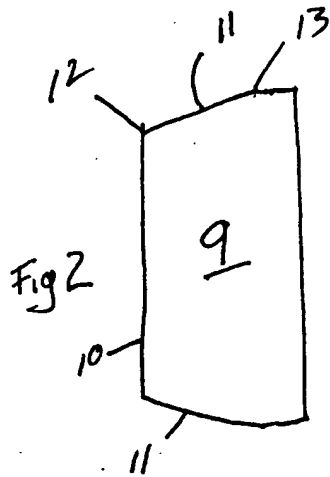


Fig 4





Fig 6

TEXTILE CONSTRUCTION

Field of the Invention

The present invention relates to the field of fitted bed sheets. In particular, the present invention relates to certain improvements in fitted sheets.

Background of the Invention

5 The present applicant is the inventor of the fitted bed sheet described and claimed in U.S. Patent No. 5,765,241. That sheet, which is fabricated from knit material, is known in the trade as an envelope sheet. It is made from a tube of knit fabric, slit
10 along an edge to form a rectangle. The side margins of the rectangle are then folded inwardly to the midline of the sheet, and top and bottom edges are sewn, joining the top and bottom edges of the folded-over margins to the top and bottom edges of the sheet
15 of fabric. The inwardly directed edges of the margins are then finished with binding in a continuous loop to finish the sheet. The advantages of such a sheet are that it is economical to manufacture, and it fits securely on a mattress, especially a multi-position hospital mattress, without coming off. It lays flat on the mattress, even when the
mattress is articulated, which results in a comfortable surface that does not have wrinkles on it to promote bed sores.

20 The applicant has identified two areas of potential improvement in the envelope sheet. First, the sewing of the top and bottom edges of the folded-over sheet is substantially transverse to the longitudinal axis of the sheet. This does tend to create
"ears" of material at the outer edge of the sheet when it is placed on a mattress. These
ears tend to be positioned on the side surface of a mattress, near the corners of same. They are untidy looking, and a waste of material. That is, they create the appearance of an ill-fitting sheet.

25 The other area of improvement lies in the binding that is sewn in a continuous loop around the inward facing edge of the margins. The applicant has developed a technique that eliminates the need for such a binding.

Summary of the Invention

In a broad aspect, then, the present invention relates to a fitted sheet for a mattress comprising a rectangular panel of knit material having a central rectangular area extending from one end of said panel to the other end thereof, and side margins flanking said central area, said side margins being folded under said central area and joined thereto by seams extending across each end of said central rectangular area, characterized in that said seams at each end of said central rectangular area are arcuate.

In another broad aspect, the present invention relates to a fitted sheet for a mattress comprising a rectangular panel of knit material having a central rectangular area extending from one end of said panel to the other end thereof, and side margins flanking said central area, said side margins being folded under said central area and joined thereto by seams extending across each end of said central rectangular area, characterized in that said rectangular panel of knit material has side edges that are not finished, and at the end of said sheet, said seams are sewn directly over said unfinished edges.

In yet another broad aspect, the present invention relates to a method of making a fitted sheet, comprising the steps of: (i) cutting a predetermined length of a tube of knit fabric; (ii) slitting said length of fabric along its length in a straight line from end to end; (iii) arranging said fabric so that the slit edges of said fabric are folded over onto the main body of said fabric; and (iv) sewing a seam across each end of the fabric, thereby to join the folded-over edges of the fabric to the main body thereof in a folded over state.

In a further broad aspect, the present invention relates to a method of making a fitted sheet comprising the steps of: (i) cutting a predetermined length of a tube of knit fabric; (ii) slitting said tube of fabric along an edge thereof, from end to end; (iii) cutting a shallow corner from each end of said tube of fabric, at the slit side thereof, from first points on the cut edge near the end, to second points on the end, near the folded-over mid-line of the slit tube of fabric; (iv) opening the fabric, and folding the side margins thereof inwardly so that at each corner thereof, the said first points are laid on top of the

said second points; and (v) sewing a seam across the top and bottom ends of the fabric, to join the folded-over margins to the main body of the sheet.

Brief Description of the Drawings

In drawings that illustrate the present invention by way of example:

5 Figure 1 is a plan view of a first embodiment of the present invention;

Figure 1A is an alternative embodiment of the sheet of Figure 1;

Figure 2 is a plan view of a cutting pattern for a sheet of a second embodiment of the present invention;

10 Figure 3 is a plan view of an opened, unsewn sheet blank cut from the pattern of Figure 2;

Figure 4 is a plan view of a sheet sewn from the blank of Figure 3;

Figure 5 is a sectional view through line V-V in Figure 4;

Figure 6 is a sectional view through line VI-VI in Figure 4.

Detailed Description of the Drawings

15 Referring now to Figure 1, a sheet 1 is illustrated. It comprises a central panel 2 with margins 3 folded over onto same. As shown in dotted lines, the top edge 4 and bottom edge 5, in a sheet according to known envelope sheet design, are sewn across in transverse lines. These edges may have binding attached for additional strength, if
20 desired. When applied to a mattress, the corners 6 at the ends of the top 4 and bottom edges of the sheet tend to form ears.

The applicant eliminates the formation of ears in the corners 6 of the envelope sheet 1 by providing arcuate 8 rather than straight end edges, as illustrated. By arcing - or even simply angling from the centre (see Figure 1a, lines 81) - the end edges, the formation of ears of fabric in each corner of the sheet is eliminated or substantially
25 reduced.

A cutting pattern for a further form of sheet is shown in Figure 2. A tube 9 of knit fabric is slit in a lengthwise direction along one edge 10. A cutting line 11 is then established at each end of the slit tube. The cutting line extends from a point 12 near

the folded, unslit edge of the tube, to a point 13 on the slit edge, at an angle of from about 5° to about 30°, preferably about 10° from the horizontal.

Referring now to Figure 3, after cutting, the result is a sheet blank, shaped generally as a large rectangle with truncated corners. That is, in each corner will be a cut line 11 having an inner end 12 and an outer end 13. As shown in Figure 4, the outer end 13 is then pulled over to meet the respective inner ends of the cut lines, at each end of the sheet blank and the piece is sewn across the end edge thereby established, with the sewing continuing all the way across each end of the sheet. The cut edges of the sheet blank may then be bound with a continuous loop of binding extending around the entire inner perimeter of the sheet, as is currently done, or as shown in Figures 5 and 6, the natural tendency for knit fabric to curl may be utilized to obtain an edge that does not require binding, yet remains free of frays or loose threads. To obtain such an edge, the sewer, when sewing across the folded-over cut lines 11 would normally and conventionally seek to flatten out the outer edge 12, which in knit fabric has a tendency to curl. However, according to the process of the present invention, the sewing machine operator permits outer edge to remain curled under, as it will do naturally, or if necessary, curls it under slightly, which can be done without anything more than rolling same with the thumb and a finger. The curled edge 10 is then laid on inner end 13, and sewn flat thereto, as shown in cross-section in Figure 5. Shown in Figure 6 is a cross-section of an unflattened portion of the knit edge. When an edge with a curled in profile as shown in Figure 6 is stretched, as will happen naturally when the sheet is fitted onto a mattress, the curl tends to tighten, due to matting of the fibres at the inner end of the curls, and this results in an edge which takes on a finished appearance, even though no finishing technique other than sewing it flat as shown in Figure 5 has been applied to the sheet. A length of binding tape may, if desired, be sewn into the seam at each end of the sheet, for added strength.

Referring to Figures 1 and 4, the present invention also provides, in a preferred embodiment, a loop 14 or a flap of tape, binding, or cloth, extending from the upper seam 8. The function of the feature is to provide a resilient surface to which an alarm or intercom bell may be attached without damaging the knit fabric of the sheet.

The completed sheet of Figure 4, when applied to a mattress, is a very good fit, with a substantial saving of material, since a narrower tube of material can be used than for an equivalent envelope sheet, and a reduction in associated trim and labour costs.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY
OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

- 5 1. A fitted sheet for a mattress comprising a rectangular panel of knit material having a central rectangular area extending from one end of said panel to the other end thereof, and side margins flanking said central area, said side margins being folded under said central area and joined thereto by seams extending across each end of said central rectangular area, characterized in that said seams at each end of said central rectangular area are arcuate.
 - 10 2. The sheet of claim 1, further characterized in that said seams are symmetrical about a mid-line of said central area that runs from end to end thereof.
 3. The sheet of claim 2, further characterized in that on each side of said mid-line of said central area, at each end of said sheet, said seam curves downwardly toward a folded side edge of said sheet.
 - 15 4. The sheet of claim 3, further characterized in that said seam is flatter near said mid-line, and more convex near said folded side edge of said sheet.
 - 20 5. A fitted sheet for a mattress comprising a rectangular panel of knit material having a central rectangular area extending from one end of said panel to the other end thereof, and side margins flanking said central area, said side margins being folded under said central area and joined thereto by seams extending across each end of said central rectangular area, characterized in that said rectangular panel of knit material has side edges that are not finished, and at the end of said sheet, said seams are sewn directly over said unfinished edges.
 6. The sheet of claim 5, further characterized in that said unfinished edge is rolled into a curled edge prior to being sewn flat.
-

7. The sheet of claim 6, further characterized in that said rectangular panel of knit material is fabricated from a tube of knit material that has been slit and opened to form a rectangle with cut edges.
- 5 8. The sheet of claim 7, further characterized in that said cut edge, in a finished sheet, is curled under into itself.
9. A sheet as claimed in any one of claims 1 - 8, including a loop or length of material extending from the seam at one end of the sheet.
- 10 10. A method of making a fitted sheet, comprising the steps of:
- i) cutting a predetermined length of a tube of knit fabric;
 - 10 ii) slitting said length of fabric along its length in a straight line from end to end;
 - iii) arranging said fabric so that the slit edges of said fabric are folded over onto the main body of said fabric; and
 - 15 iv) sewing a seam across each end of the fabric, thereby to join the folded-over edges of the fabric to the main body thereof in a folded over state.
11. The method of claim 10, wherein said slit edges are sewn to said main body in an unfinished state.
12. The method of claim 11, wherein said slit edges are curled inwardly before being seamed to said main body of said fabric.
- 20 13. The method of claim 12, wherein said seams are generally convexly arcuate.
14. A method of making a fitted sheet comprising the steps of:
- i) cutting a predetermined length of a tube of knit fabric;
 - ii) slitting said tube of fabric along an edge thereof, from end to end;
 - 25 iii) cutting a shallow corner from each end of said tube of fabric, at the slit side thereof, from first points on the cut edge near the end, to second points on the end, near the folded-over mid-line of the slit tube of fabric;

- 5
- iv) opening the fabric, and folding the side margins thereof inwardly so that at each corner thereof, the said first points are laid on top of the said second points; and
 - v) sewing a seam across the top and bottom ends of the fabric, to join the folded-over margins to the main body of the sheet.
15. The method of claim 14, wherein when said seam is sewn, the cut edge of said fabric is curled in, and sewn flat in the curled-in condition.

ABSTRACT

5 A fitted sheet for a mattress comprises a rectangular panel of knit material having a central rectangular area extending from one end of said panel to the other end thereof. Side margins flank the central area, and folded under said central area and joined thereto by seams extending across each end of the central rectangular area. The sheet is characterized in that the seams at each end of said central rectangular area are arcuate.